



LATHAM INTERNATIONAL

THE HYDRAULIC RAM PUMP



**HEAVY DUTY PUMPS FOR FILTER PRESS AND
TRANSFER APPLICATIONS**



2003/358

Introduction

This is a ram type reciprocating piston pump that is driven by a separate electrically powered hydraulic power unit. The pump and hydraulic power unit form a single integrated pump set.

The pump is of robust, heavy-duty design and construction with an anticipated working life well in excess of 20 years with minimal maintenance, which gives cost effective handling of slurries.

The pump can be used on filter press feed and sludge transfer applications giving a controlled constant flow or a diminishing flow with increased pressure.

To obtain higher flow rates pumps can be installed as multiple units and controlled from a single hydraulic power pack.



Model 160 Ram Pump (Stainless Steel)



Application

This style of pump was originally designed for the pumping of clay slip in the pottery industry but due to the pumping characteristics of the unit it has been used in many industrial applications.

- **POTABLE WATER & WASTE WATER**
Handling of solids from Alum & Ferric sludges. Handling sewage sludges
- **INDUSTRIAL EFFLUENT**
Pumping a wide range of waste streams
- **CHEMICAL & PHARMACEUTICAL INDUSTRY**
Handling abrasive and crystalline slurries
- **MINING & REFINING**
Pumping tailings, fines and other slurries
- **CERAMICS**
Raw material transfer and production

The hydraulic ram pump has the ability to vary from maximum flow at low pressure to a minimal flow at high pressure, which makes this one of the most ideal pumps to handle the feeding of slurries and effluent streams to a filter press.

As the hydraulic supply to the pump is pressure compensated it ensures safe operation even on longer high-pressure cycles. The automatic pressure compensating also allows this pump to be used for transfer operation with low maintenance costs on long small bore pipelines where pressure increases can occur due to friction losses.

The compensating characteristic of this pump ensures the system can be set at a pre determined pressure which will not be exceeded should blockages occur.



Model 267 Ram Pump

Operation and Construction

Operation

The pump is a simple robust mechanical construction driven by state of the art variable hydraulics in turn controlled by electronic proximity switches to determine position and direction of the main ram.

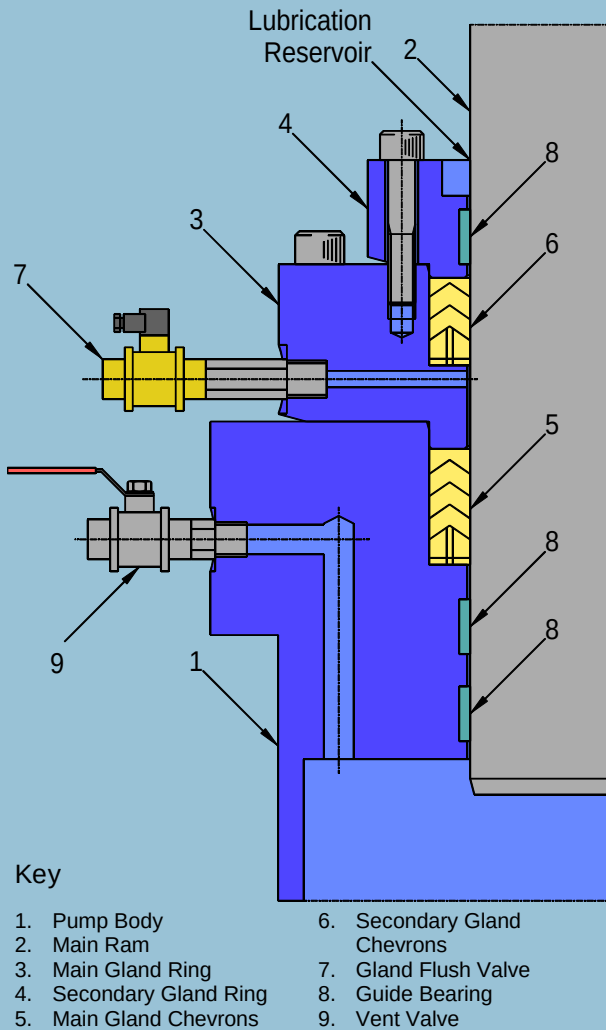


Figure 1

Suction & Delivery Valves

Suction and delivery valves are of the ball valve type and consist of a polyurethane iron cored ball and a solid polyurethane valve seat.

The fabricated ball valve housing is constructed to allow adequate clearance for the passage of large solids. The passage of material through the valve box causes the ball valve to continually rotate ensuring the ball valve receives even wear, especially when pumping abrasive Slurries.

Removal of the valve box lid allows easy access to the valve box chamber for ball valve and seat replacement.

Construction

The pump body and the valve boxes are one piece steel fabrications. The sludge ram is manufactured from stainless steel. The sludge seals are maintenance free dual chevron rings, which are replaceable as a service item without the removal of the sludge ram. The first set of rings provide the initial seal between the main ram and the gland housing, with the upper chevron providing a secondary seal and scrapper facility to ensure clean efficient reciprocation of the ram. (See figure 1)

Light weight, easily removable, guards enclose the exposed portion of the sludge ram and hydraulic cylinder piston rod. Delivery sludge dampers are provided to eliminate the hammer due to the pulsating action of the pump. These dampers are not coded pressure vessels.

The hydraulic cylinder driving the sludge ram is built to off shore specifications and is of a hardwearing design featuring a chrome piston rod. The hydraulic cylinder also features extensive internal guidance and support for the piston rod thereby eliminating lateral forces upon the hydraulic seals, which can promote oil leaks. The top of the hydraulic cylinder features internal, hydraulic cushioning to facilitate absolute control over the sludge ram at the top of the stroke where the ram changes direction from up to down. This contributes to the quite operation of the pump.

The hydraulic cylinder is supported upon a fabrication mounted on top of the pump body through which the chrome piston rod passes.

Construction Materials

For most applications the pump is constructed from fabricated mild steel with a stainless steel main ram and polyurethane gland packing, ball valves and seats.

However for applications where temperature or abrasion may be an issue the pump can be constructed with more suitable materials to withstand the duty.

Hydraulic Power Pack

The hydraulic unit comprises an hydraulic oil tank beneath which sits an electric motor driving through a bell housing and coupling to a variable speed, pressure compensated hydraulic oil pump.

The hydraulic oil tank features internal baffles to encourage circulation and specific movement within the hydraulic oil, which prevents the hydraulic oil from passing straight between the suction and discharge ports in the tank. The tank is sealed except for a breather but has removable panels for access to clean the inside of the tank. A separate, sealed access point is available for topping up the tank. A visual level gauge is provided on the side of the oil tank.

A hydraulic pressure gauge and isolator is provided with the hydraulic control valve stack to enable the hydraulic pressures to be set correctly. The hydraulic valve stack features a pressure relief valve and an open centre spool valve, which enables the electric motor to start under no load conditions.


A drain plug is provided for draining the hydraulic oil tank during an oil change. A suction strainer is provided to protect the hydraulic oil pump against debris. Full flow oil filtration is provided which features a visual condition indicator.

Electronic Changeover System

The hydraulic control valves are operated by solenoids positioned on the oil block located on the top of the tank. These control the position of the spool and hence the direction of the main ram.

The solenoids are controlled by the proximity switches mounted through the frame at the side of the main ram. This identifies the position of the crosshead and initiates a signal to be sent to reverse the flow of hydraulic oil to the hydraulic cylinder.

The length of stroke can be adjusted by the position of the proximity switches in the locating slots. Further fine adjustment can be made using the choke controls beneath the solenoid valve.

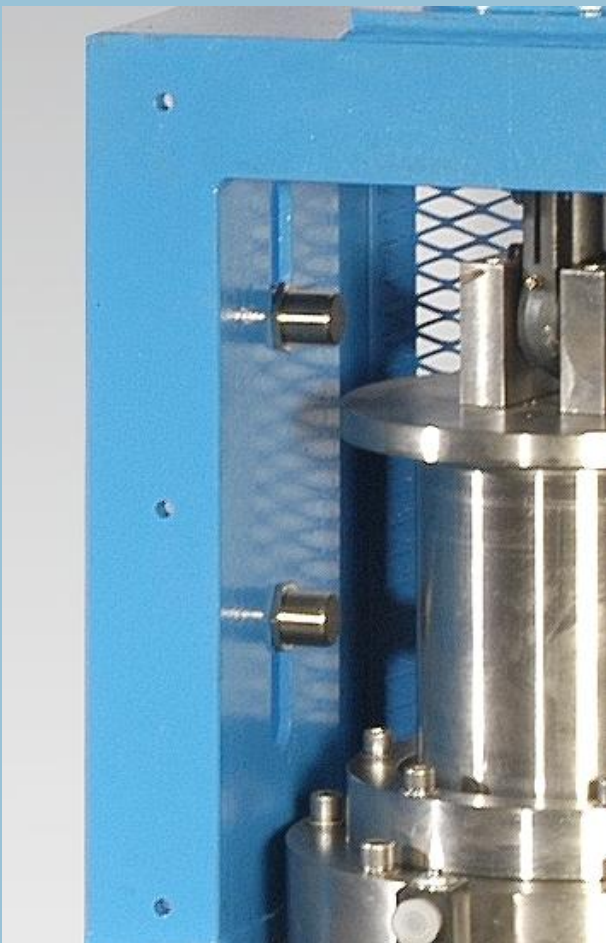

Electronic Changeover Proximity Sensors



Hydraulic Valves

Latham International New & Refurbished Ram Pumps

This is a ram type reciprocating piston pump that is driven by a separate electrically powered hydraulic power unit.

The pump and hydraulic power unit form a single integrated pump set.

The pump is of robust, heavy-duty design and construction with an anticipated working life well in excess of 20 years. The pump body and the valve boxes are one piece steel fabrications. The sludge ram is manufactured from stainless steel. The sludge seals are maintenance free chevron rings, which are replaceable as a service item without the removal of the sludge ram.

The hydraulic cylinder driving the sludge ram is built to off shore specifications and is of a hardwearing design featuring a chrome piston rod. The hydraulic cylinder also features extensive internal guidance and support for the piston rod thereby eliminating lateral forces upon the hydraulic seals, which can promote oil leaks. The top of the hydraulic cylinder features internal, hydraulic cushioning to facilitate absolute control over the sludge ram at the top of the stroke where the ram changes direction from up to down. This contributes to the quiet operation of the pump.

This hydraulic unit comprises a hydraulic oil tank beneath which sits an electric motor driving through a bell housing and coupling to a variable speed, pressure compensated hydraulic oil pump.



Four Model 267 Ram Pumps



Two Refurbished 6" Willett Pumps

Range (Ram Size)

110	160	267	320	415	495
-----	-----	-----	-----	-----	-----

Latham Ram Pump and Willett Pump Spares

Latham International are able to supply spares for our whole range of pumps, along with spares to suit Willett Pumps.



Latham Ram Pump and Willett Pump Spares

We stock an extensive range of consumable replacement parts for Latham Ram Pumps, Willett Pumps and many others. The parts we stock include:

Ball Valves (Suction and Delivery), Gland Chevron Seals (Polyurethane), Gland Packings (Rubber and Non Metallic), Valve Box Cover Gaskets and O'Rings, Valve Seats, Porcelain Rams (Ceramic Rams), Ram Bolts, Ram Washers, Ram Gaskets, Stalk Valves, Stalk Valve Springs, Stalk Valve Bushes, Stalk Valve Discs, Stalk Valve Back Plates, Hydraulic Cylinder Chromed Piston Rods, Twinset Seals, Hypack Seals, Oil Pumps, Solenoid Valves, Filters, Hydraulic Valves.


Many other parts are available on request.

Pump Outputs


Below are the graphs, showing the output of the vertical ram pumps available from Latham International Ltd.

**Note: For all pumps optimum operating range is between 15 – 30 (strokes/min)
Flow and Pressure Variable**

Output for Model 110 Ram Pump

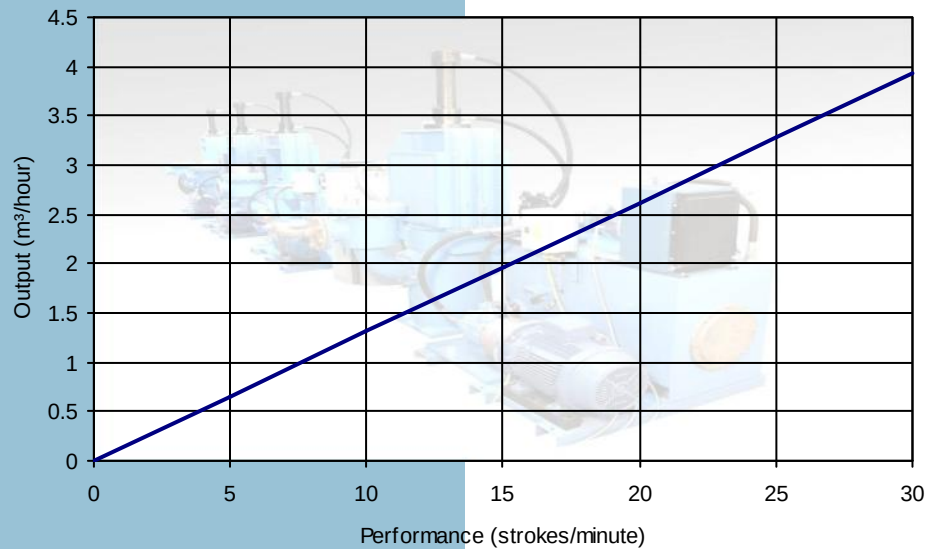


Output for Model 160 Ram Pump

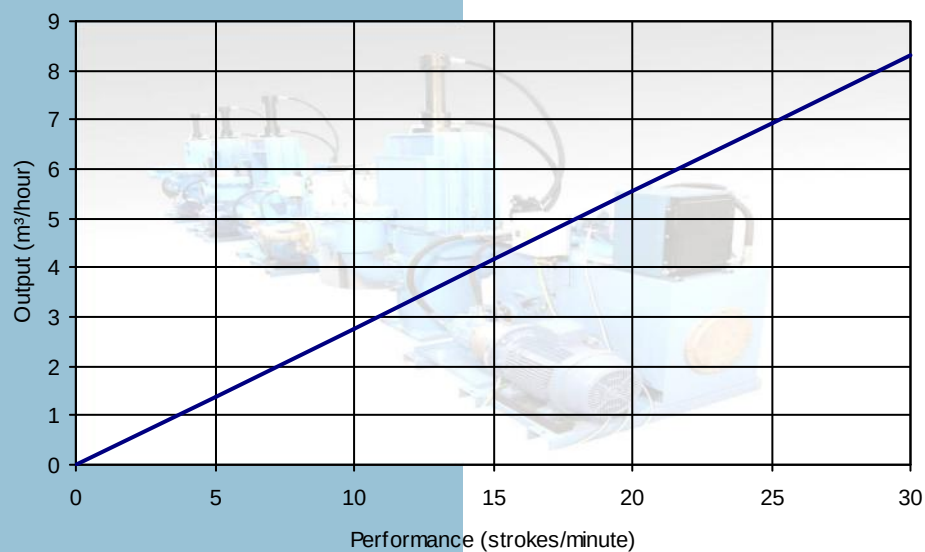


Pump Outputs

Output for Model 267 Ram Pump

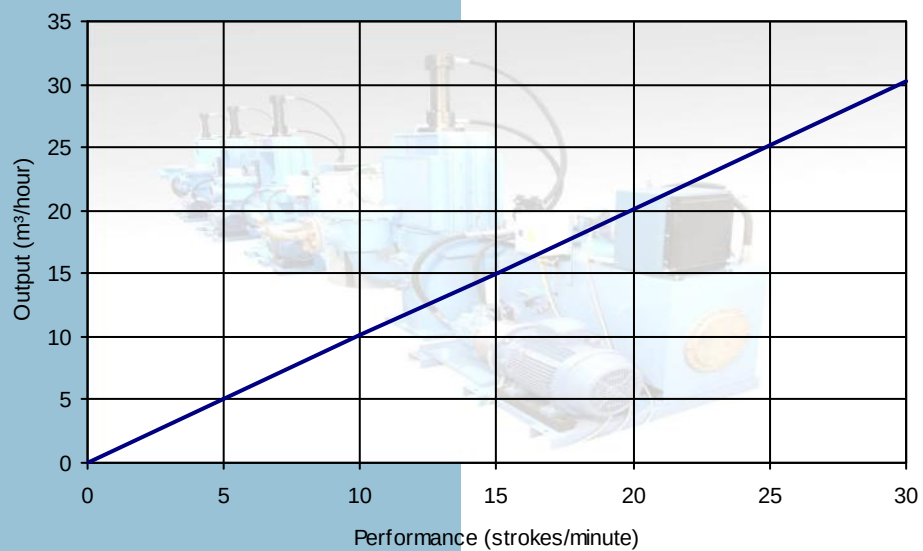


Output for Model 320 Ram Pump

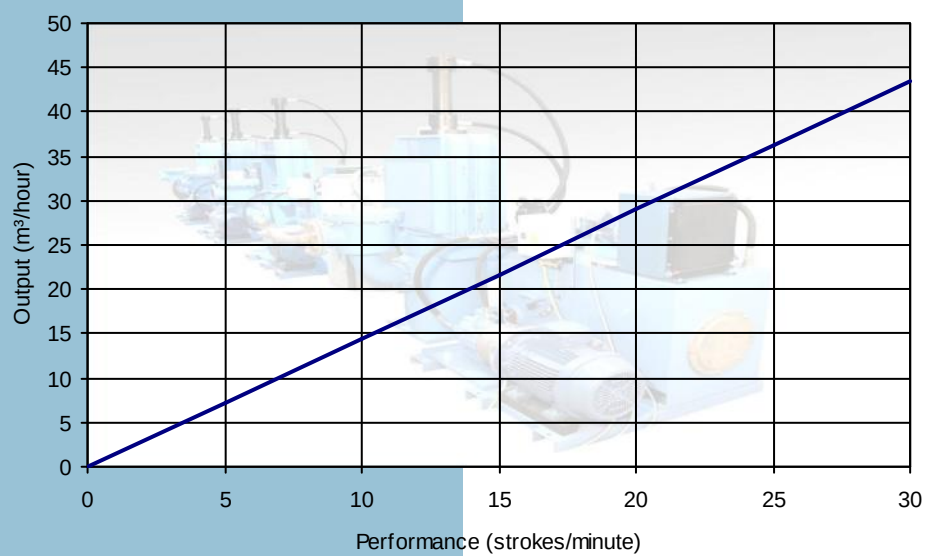


Pump Outputs

Output for Model 415 Ram Pump

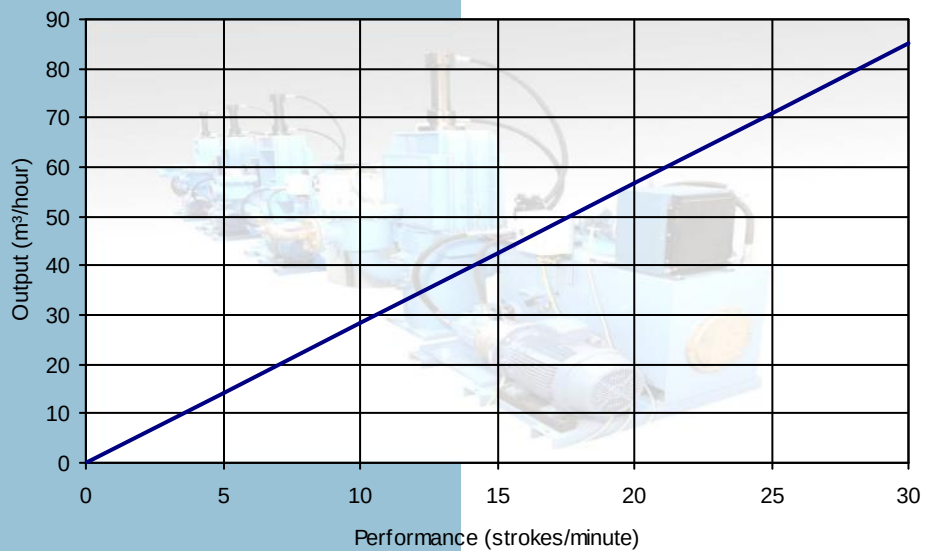

Output for Model 495 Ram Pump

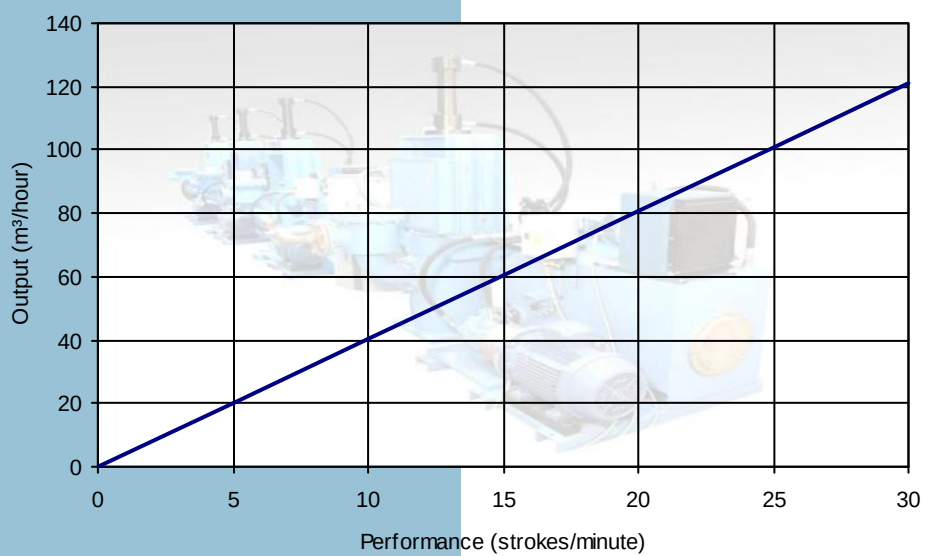

Technical Specifications

Model	Pressure (Bar)	Motor (kW)	Motor (Hp)	Maximum Pump Capacity (m ³ /hour)	Number of Strokes (stroke/min)	Stroke Length (Mm)
110-10	10	2.2	3.0	3.9	30	230
110-25	25	5.5	7.5	3.9	30	230
160-10	10	4.0	5.5	8.3	30	230
160-25	25	11.0	15.0	8.3	30	230
267-10	10	15.0	20.0	30.2	30	300
267-25	25	45.0	60.0	30.2	30	300
320-10	10	20.0	28.0	43.4	30	300
320-15	15	30.0	40.0	43.4	30	300
415-10	10	25.0	35.0	85.2	30	350
415-15	15	37.0	50.0	85.2	30	350
415-25	25	55.0	74.0	85.2	30	350
495-10	10	75.0	100.0	121.2	30	350
495-25	25	185.0	250.0	121.2	30	350

Latham International Ltd
Unit 3, Rowhurst Close
Rowhurst Close Industrial Estate
Chesterton
Newcastle-under-Lyme
Staffordshire
ST5 6BD
United Kingdom

Tel: +44 (0) 1782 565364
Fax: +44 (0) 1782 564886
Email: info@lathaminternational.com
Web : www.lathaminternational.com

Version 2.0 (03/11/2015)